SEALED OUTDOOR DISPLAY · WALL MOUNT

65″ HighBright Outdoor Display

Model **SSI-HB65W** · Wall bracket included · Mounts landscape or portrait




A fully sealed, 3,000-nit display for patios, storefronts, drive-thrus, pool decks and outdoor theaters, built to stay outside year-round.

3,000	4K	AG / AR	5.9″
nits brightness	Ultra HD	bonded glass	overall depth

Screen size	65″ class (diagonal)
Outer dimensions	59.4″ W × 34.8″ H × 5.9″ D (1509 × 884 × 150 mm)
Viewing area	56.3″ × 31.7″ (1429 × 804 mm)
Mounting pattern	15.7″ × 27.6″ (400 × 700 mm), 4 × M12

Dimensions · wall mount

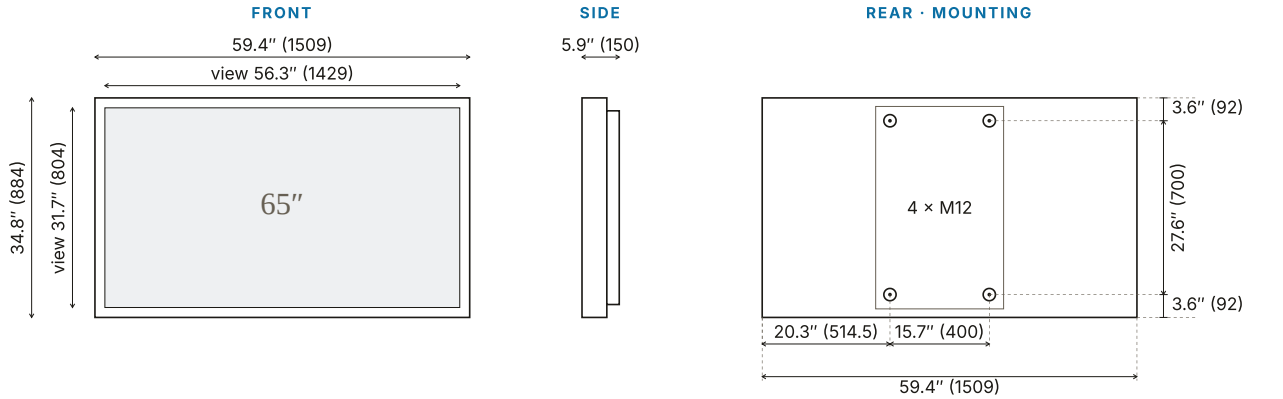

Inches (millimeters). Viewing area shown shaded.

Specifications

Brightness	3,000 nits
Resolution	3840 × 2160 4K Ultra HD
Panel	Grade A wide-temp industrial LCD
Cover glass	AG/AR tempered glass, fully bonded

Enclosure	Fully sealed, aluminum heat sink
Electronics	Wide-temperature boards throughout
Auto-dimming	Brightness sensor + remote receiver
Connections	HDMI, USB, power (sealed); Wi-Fi

Included & options

3,000-nit brightness
Standard on every size

AG / AR glass
Anti-glare, anti-reflective, fully bonded

Wall bracket
Included, matched to the M12 points

Options
Capacitive touch · floor stand (page 2)


OPTIONAL FLOOR STAND

65″ HighBright on Floor Stand

Display **SSI-HB65W** + floor stand **SSI-FS65**

Turn the 65″ HighBright display into a freestanding outdoor kiosk. The stand bolts to a concrete pad and brings power and signal cables up through the base, out of sight.

Dimensions · floor stand

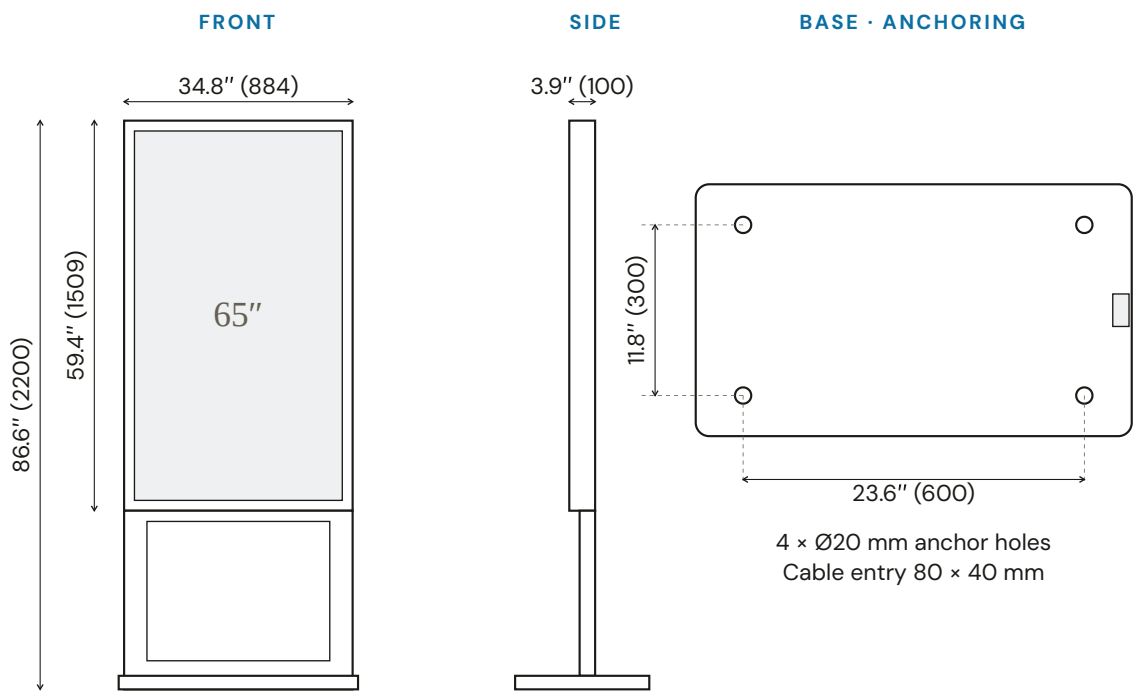

Inches (millimeters). Base plan enlarged for clarity.

Floor stand details

Overall height	86.6″ (2200 mm)
Width	34.8″ (884 mm)
Display section	59.4″ tall (1509 mm), mounted at the top of the stand
Anchoring	4 × Ø20 mm holes, 23.6″ × 11.8″ (600 × 300 mm)
Cable entry	80 × 40 mm opening in the base plate
Stand model	SSI-FS65

Anchor to a level concrete pad sized for local wind loads. Confirm anchoring with your installer or engineer.