SSI | SCREEN SOLUTIONS INTERNATIONAL

HighBright Outdoor Displays

Sealed, 3,000-nit 4K outdoor screens in six sizes from 32″ to 75″. Wall bracket included, floor stands available, free shipping nationwide.



THE HIGHBRIGHT SERIES

Built to live outside

Indoor TVs fail outdoors: they overheat, fog up and wash out in sunlight. HighBright displays are sealed, high-brightness screens made for permanent outdoor installation, so they can be mounted on a wall or stand and left there year-round.

Every size ships in the same configuration: 4K resolution, 3,000-nit brightness, anti-glare and anti-reflective bonded glass, and a matched wall bracket in the box.



Where they go

- Restaurant patios and menus
- Drive-thru and curbside
- Retail storefronts and windows
- Pool decks and resorts
- Backyard and outdoor theaters
- Campus and transit wayfinding
- Stadiums and venues
- Fuel and EV charging stations

Features

3,000 nits
Bright enough to read in direct daylight. A built-in sensor dims the screen as light fades.

Fully sealed
All-in-one sealed cabinet that keeps out dust and moisture, cooled through an aluminum heat sink.

AG / AR bonded glass
Ultra-clear tempered anti-glare, anti-reflective glass bonded across the full panel.

Wide-temperature build
Grade A industrial panel with wide-temperature driver, power and control boards.

Slim wall mount
5.9″ deep with the included bracket. Four M12 mounting points on every size.

Options
Glass-glass capacitive touch and matching floor stands for freestanding kiosks.

MODELS AND PRICING

Six sizes, one configuration

Every display includes 4K resolution, 3,000-nit brightness, AG/AR bonded glass and a wall bracket. Add touch or a floor stand as needed.

Free shipping
Nationwide on every order

Wall bracket
Included with every display

4K · 3,000 nits
Standard on every size

Size	Model	W × H × D	Viewing area	Display price	Add touch	Floor stand
32″	SSI-HB32W	30.7″ × 18.6″ × 5.9″	27.5″ × 15.5″	**$3,820**	+$240	+$849
43″	SSI-HB43W	40.2″ × 24.0″ × 5.9″	37.1″ × 20.9″	**$4,973**	+$400	+$849
49″	SSI-HB49W	45.4″ × 26.9″ × 5.9″	42.3″ × 23.8″	**$5,545**	+$600	+$999
55″	SSI-HB55W	50.8″ × 30.0″ × 5.9″	47.6″ × 26.8″	**$6,593**	+$640	+$999
65″	SSI-HB65W	59.4″ × 34.8″ × 5.9″	56.3″ × 31.7″	**$9,793**	+$999	+$1,199
75″	SSI-HB75W	Dimensions on request		**$15,863**	+$1,299	+$1,799

Prices in US dollars, effective November 2026, and subject to change. Sizes are nominal diagonal. Display price includes the wall bracket. Touch is glass-glass projected capacitive, built in. Dimensions shown for landscape mounting; every display also mounts in portrait.

How to order

1. Choose a size	32″, 43″, 49″, 55″, 65″ or 75″.
2. Add options	Capacitive touch and/or a matching floor stand.
3. Get a quote	Call (888) 631-5880 or email ssisales@ssidisplays.com. Dealer and volume pricing available.


OPTIONAL FLOOR STANDS

Freestanding outdoor kiosks

Each display has a matching floor stand that turns it into a freestanding kiosk. The stand bolts to a concrete pad, and cables come up through the base out of sight.

Size	Stand model	Overall height	Width	Anchor pattern	Stand price
32″	SSI-FS32	66.9″ (1700 mm)	18.6″	9.8″ × 11.8″	**$849**
43″	SSI-FS43	70.9″ (1800 mm)	24.0″	13.8″ × 11.8″	**$849**
49″	SSI-FS49	74.8″ (1900 mm)	26.9″	15.7″ × 11.8″	**$999**
55″	SSI-FS55	78.7″ (2000 mm)	30.0″	19.7″ × 11.8″	**$999**
65″	SSI-FS65	86.6″ (2200 mm)	34.8″	23.6″ × 11.8″	**$1,199**
75″	SSI-FS75	Dimensions on request			**$1,799**

Example: 49″ on floor stand

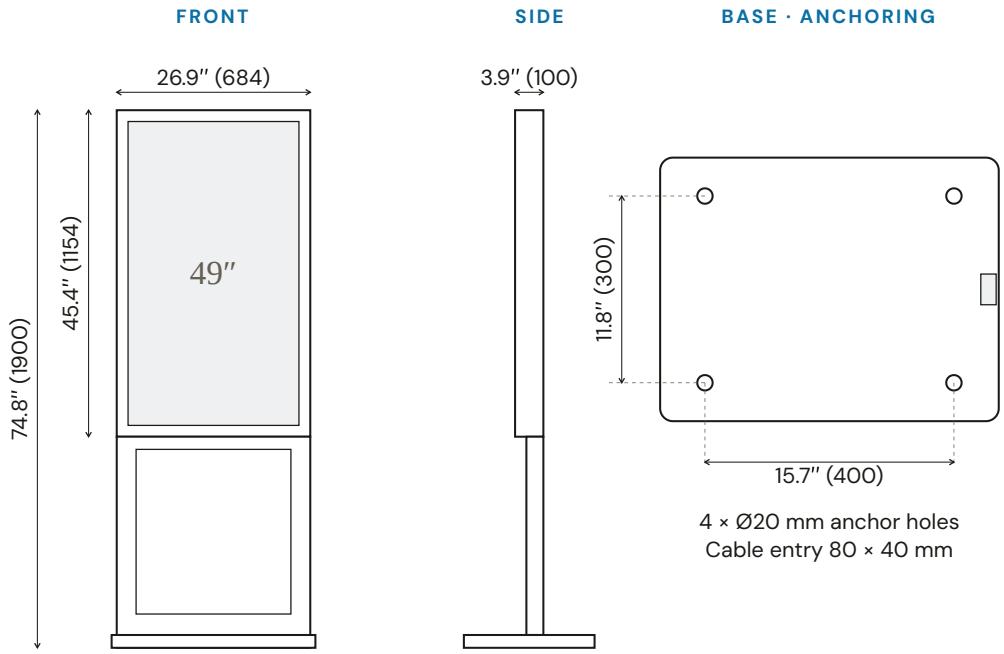


Inches (millimeters). Base plan enlarged for clarity.

Anchor holes are Ø20 mm. Size the concrete pad and anchors for local wind loads.

SPECIFICATIONS

Common to every size

Brightness	3,000 nits
Resolution	3840 × 2160 4K Ultra HD
Panel	Grade A, wide-temperature industrial LCD
Cover glass	Ultra-clear tempered glass with anti-glare / anti-reflective treatment, full-surface bonded
Enclosure	Fully sealed all-in-one cabinet, aluminum heat-sink cooling
Electronics	Wide-temperature driver, power, temperature-control and constant-current boards
Auto-dimming	Built-in brightness sensor and remote-control receiver
Connections	HDMI, USB and power through sealed cable entries; Wi-Fi antenna
Mounting	4 × M12 threaded mounting points; wall bracket included
Touch (optional)	Glass-glass (G+G) projected capacitive touch

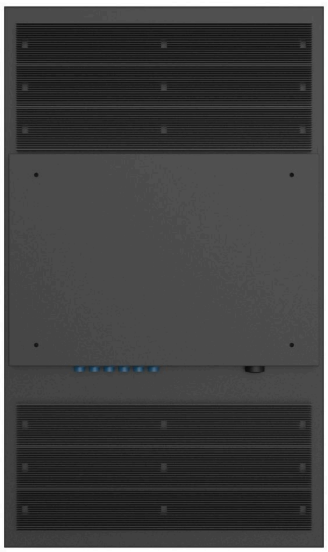

Dimensions by size (mm)

Size	W × H × D	Viewing area	Wall mount pattern (4 × M12)	Height on floor stand
32″	473 × 779 × 150	393 × 699	300 × 400	1700
43″	610 × 1022 × 150	530 × 942	500 × 400	1800
49″	684 × 1154 × 150	604 × 1074	500 × 400	1900
55″	762 × 1291 × 150	681 × 1210	600 × 400	2000
65″	884 × 1509 × 150	804 × 1429	700 × 400	2200

Detailed drawings for each size follow on the next pages. 75″ drawings available on request.

SEALED OUTDOOR DISPLAY · WALL MOUNT

32″ HighBright Outdoor Display

Model **SSI-HB32W** · Wall bracket included · Mounts landscape or portrait




A fully sealed, 3,000-nit display for patios, storefronts, drive-thrus, pool decks and outdoor theaters, built to stay outside year-round.

3,000	4K	AG / AR	5.9″
nits brightness	Ultra HD	bonded glass	overall depth

Screen size	32″ class (diagonal)
Outer dimensions	30.7″ W × 18.6″ H × 5.9″ D (779 × 473 × 150 mm)
Viewing area	27.5″ × 15.5″ (699 × 393 mm)
Mounting pattern	15.7″ × 11.8″ (400 × 300 mm), 4 × M12

Dimensions · wall mount

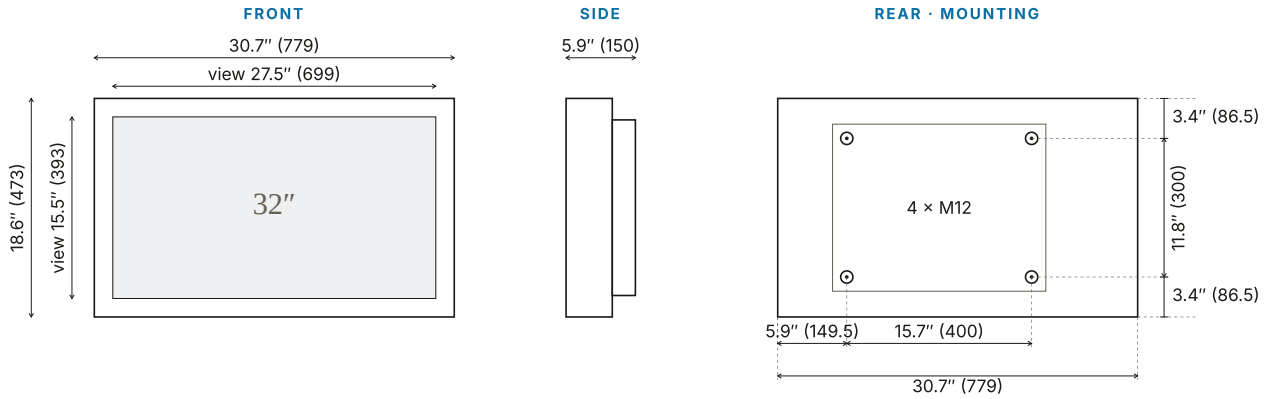

Inches (millimeters). Viewing area shown shaded.

Specifications

Brightness	3,000 nits
Resolution	3840 × 2160 4K Ultra HD
Panel	Grade A wide-temp industrial LCD
Cover glass	AG/AR tempered glass, fully bonded

Enclosure	Fully sealed, aluminum heat sink
Electronics	Wide-temperature boards throughout
Auto-dimming	Brightness sensor + remote receiver
Connections	HDMI, USB, power (sealed); Wi-Fi

Included & options

3,000-nit brightness
Standard on every size

AG / AR glass
Anti-glare, anti-reflective, fully bonded

Wall bracket
Included, matched to the M12 points

Options
Capacitive touch · floor stand (page 2)


OPTIONAL FLOOR STAND

32″ HighBright on Floor Stand

Display **SSI-HB32W** + floor stand **SSI-FS32**

Turn the 32″ HighBright display into a freestanding outdoor kiosk. The stand bolts to a concrete pad and brings power and signal cables up through the base, out of sight.

Dimensions · floor stand

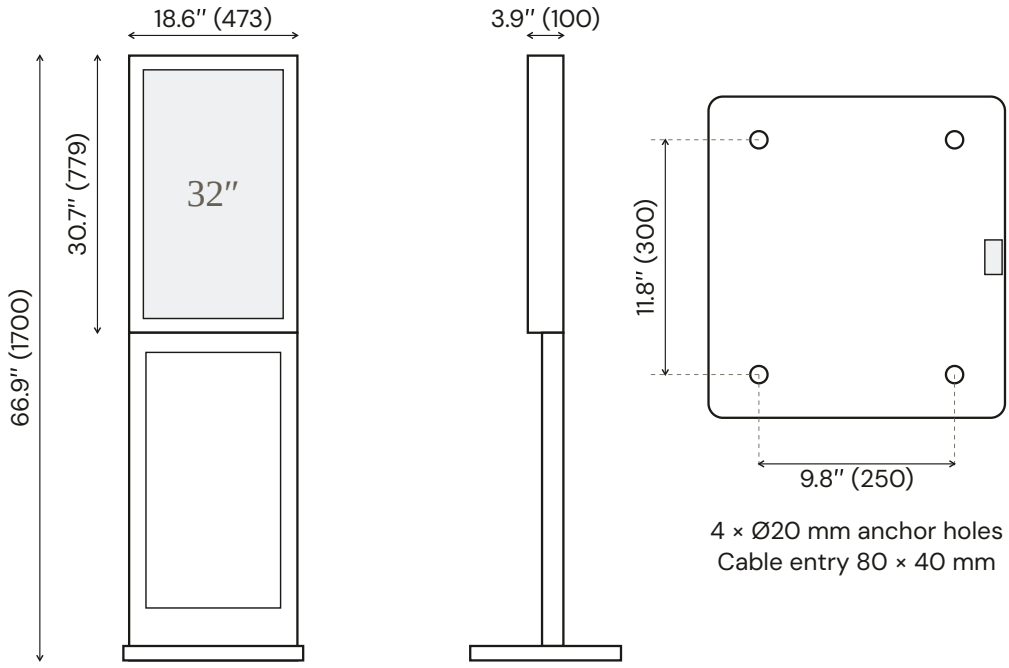

Inches (millimeters). Base plan enlarged for clarity.

Floor stand details

Overall height	66.9″ (1700 mm)
Width	18.6″ (473 mm)
Display section	30.7″ tall (779 mm), mounted at the top of the stand
Anchoring	4 × Ø20 mm holes, 9.8″ × 11.8″ (250 × 300 mm)
Cable entry	80 × 40 mm opening in the base plate
Stand model	SSI-FS32

Anchor to a level concrete pad sized for local wind loads. Confirm anchoring with your installer or engineer.

SEALED OUTDOOR DISPLAY · WALL MOUNT

43″ HighBright Outdoor Display

Model **SSI-HB43W** · Wall bracket included · Mounts landscape or portrait




A fully sealed, 3,000-nit display for patios, storefronts, drive-thrus, pool decks and outdoor theaters, built to stay outside year-round.

3,000	4K	AG / AR	5.9″
nits brightness	Ultra HD	bonded glass	overall depth

Screen size	43″ class (diagonal)
Outer dimensions	40.2″ W × 24.0″ H × 5.9″ D (1022 × 610 × 150 mm)
Viewing area	37.1″ × 20.9″ (942 × 530 mm)
Mounting pattern	15.7″ × 19.7″ (400 × 500 mm), 4 × M12

Dimensions · wall mount

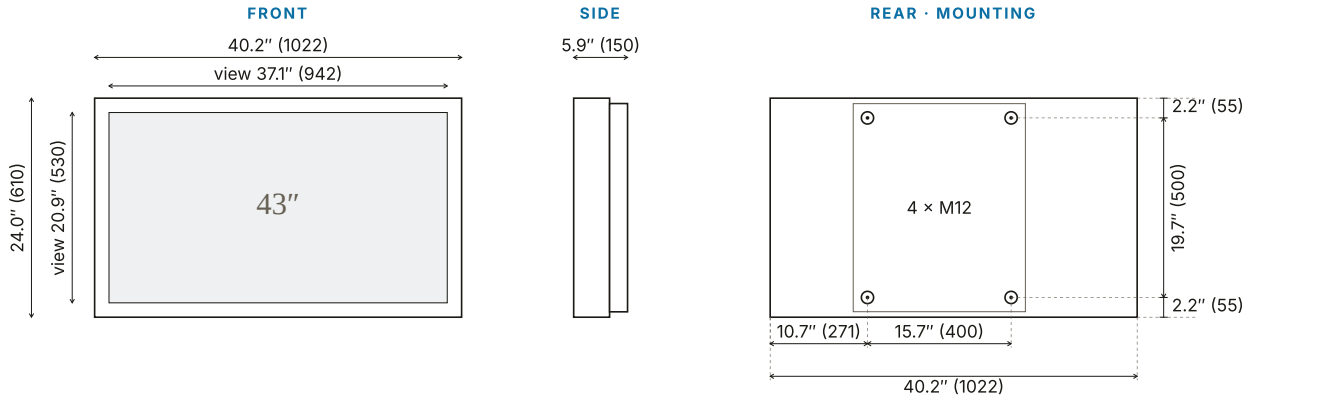

Inches (millimeters). Viewing area shown shaded.

Specifications

Brightness	3,000 nits
Resolution	3840 × 2160 4K Ultra HD
Panel	Grade A wide-temp industrial LCD
Cover glass	AG/AR tempered glass, fully bonded

Enclosure	Fully sealed, aluminum heat sink
Electronics	Wide-temperature boards throughout
Auto-dimming	Brightness sensor + remote receiver
Connections	HDMI, USB, power (sealed); Wi-Fi

Included & options

3,000-nit brightness
Standard on every size

AG / AR glass
Anti-glare, anti-reflective, fully bonded

Wall bracket
Included, matched to the M12 points

Options
Capacitive touch · floor stand (page 2)


OPTIONAL FLOOR STAND

43″ HighBright on Floor Stand

Display **SSI-HB43W** + floor stand **SSI-FS43**

Turn the 43″ HighBright display into a freestanding outdoor kiosk. The stand bolts to a concrete pad and brings power and signal cables up through the base, out of sight.

Dimensions · floor stand

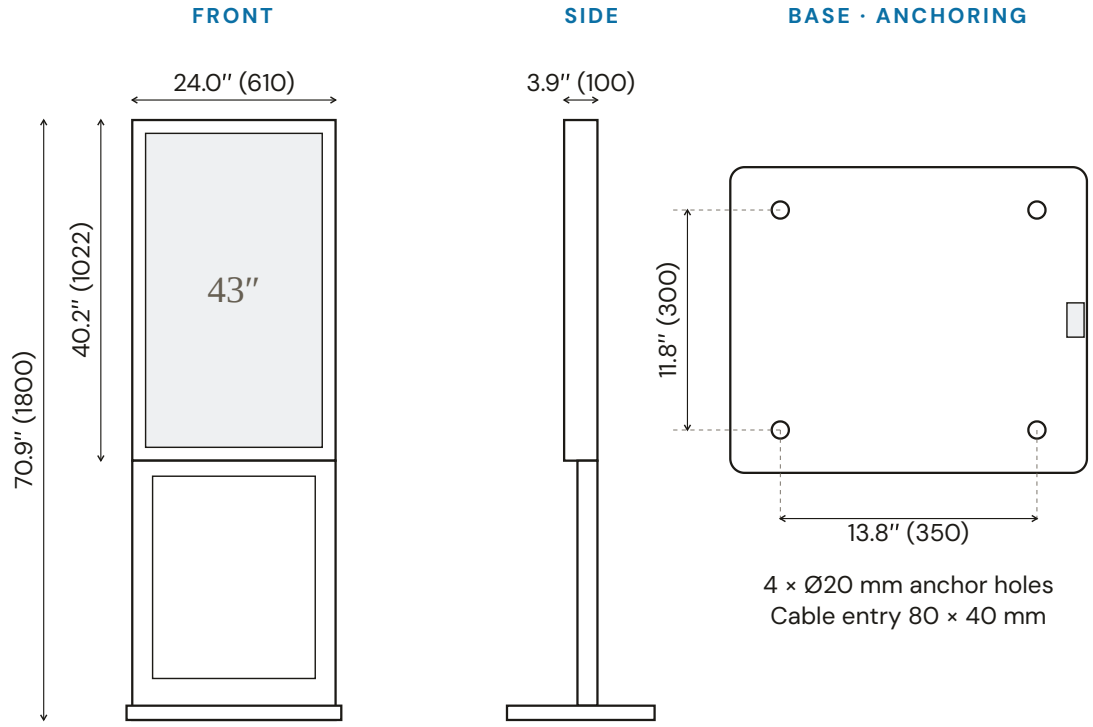

Inches (millimeters). Base plan enlarged for clarity.

Floor stand details

Overall height	70.9″ (1800 mm)
Width	24.0″ (610 mm)
Display section	40.2″ tall (1022 mm), mounted at the top of the stand
Anchoring	4 × Ø20 mm holes, 13.8″ × 11.8″ (350 × 300 mm)
Cable entry	80 × 40 mm opening in the base plate
Stand model	SSI-FS43

Anchor to a level concrete pad sized for local wind loads. Confirm anchoring with your installer or engineer.

SEALED OUTDOOR DISPLAY · WALL MOUNT

49″ HighBright Outdoor Display

Model **SSI-HB49W** · Wall bracket included · Mounts landscape or portrait




A fully sealed, 3,000-nit display for patios, storefronts, drive-thrus, pool decks and outdoor theaters, built to stay outside year-round.

3,000	4K	AG / AR	5.9″
nits brightness	Ultra HD	bonded glass	overall depth

Screen size	49″ class (diagonal)
Outer dimensions	45.4″ W × 26.9″ H × 5.9″ D (1154 × 684 × 150 mm)
Viewing area	42.3″ × 23.8″ (1074 × 604 mm)
Mounting pattern	15.7″ × 19.7″ (400 × 500 mm), 4 × M12

Dimensions · wall mount

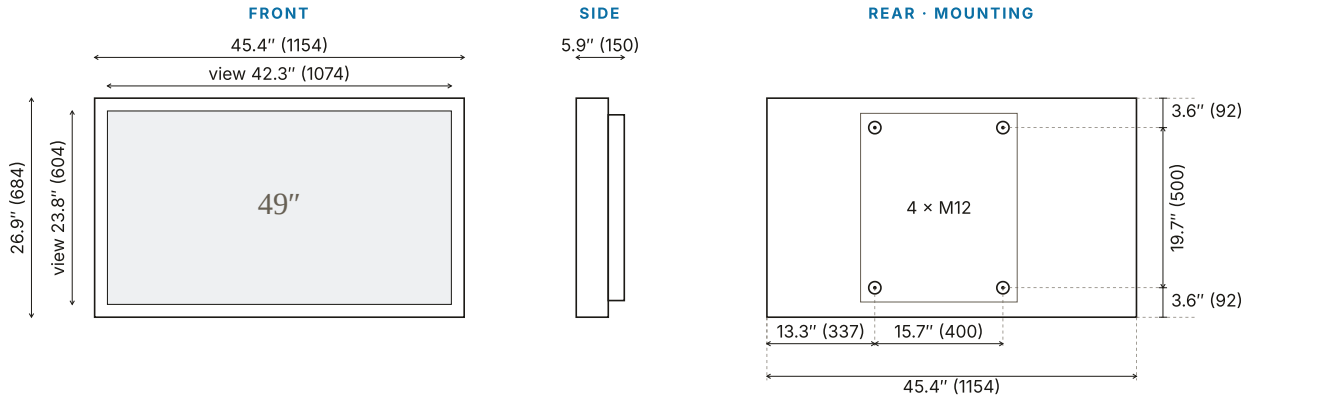

Inches (millimeters). Viewing area shown shaded.

Specifications

Brightness	3,000 nits
Resolution	3840 × 2160 4K Ultra HD
Panel	Grade A wide-temp industrial LCD
Cover glass	AG/AR tempered glass, fully bonded

Enclosure	Fully sealed, aluminum heat sink
Electronics	Wide-temperature boards throughout
Auto-dimming	Brightness sensor + remote receiver
Connections	HDMI, USB, power (sealed); Wi-Fi

Included & options

3,000-nit brightness
Standard on every size

AG / AR glass
Anti-glare, anti-reflective, fully bonded

Wall bracket
Included, matched to the M12 points

Options
Capacitive touch · floor stand (page 2)


OPTIONAL FLOOR STAND

49″ HighBright on Floor Stand

Display **SSI-HB49W** + floor stand **SSI-FS49**

Turn the 49″ HighBright display into a freestanding outdoor kiosk. The stand bolts to a concrete pad and brings power and signal cables up through the base, out of sight.

Dimensions · floor stand

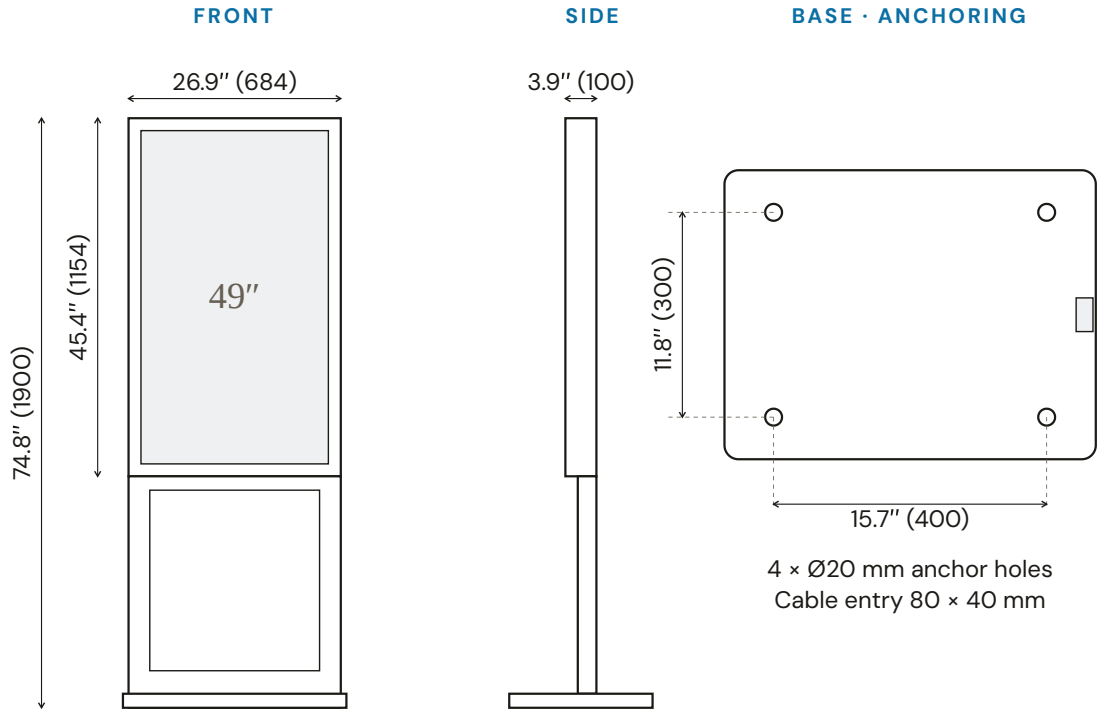

Inches (millimeters). Base plan enlarged for clarity.

Floor stand details

Overall height	74.8″ (1900 mm)
Width	26.9″ (684 mm)
Display section	45.4″ tall (1154 mm), mounted at the top of the stand
Anchoring	4 × Ø20 mm holes, 15.7″ × 11.8″ (400 × 300 mm)
Cable entry	80 × 40 mm opening in the base plate
Stand model	SSI-FS49

Anchor to a level concrete pad sized for local wind loads. Confirm anchoring with your installer or engineer.

SEALED OUTDOOR DISPLAY · WALL MOUNT

55″ HighBright Outdoor Display

Model **SSI-HB55W** · Wall bracket included · Mounts landscape or portrait




A fully sealed, 3,000-nit display for patios, storefronts, drive-thrus, pool decks and outdoor theaters, built to stay outside year-round.

3,000	4K	AG / AR	5.9″
nits brightness	Ultra HD	bonded glass	overall depth

Screen size	55″ class (diagonal)
Outer dimensions	50.8″ W × 30.0″ H × 5.9″ D (1291 × 762 × 150 mm)
Viewing area	47.6″ × 26.8″ (1210 × 681 mm)
Mounting pattern	15.7″ × 23.6″ (400 × 600 mm), 4 × M12

Dimensions · wall mount

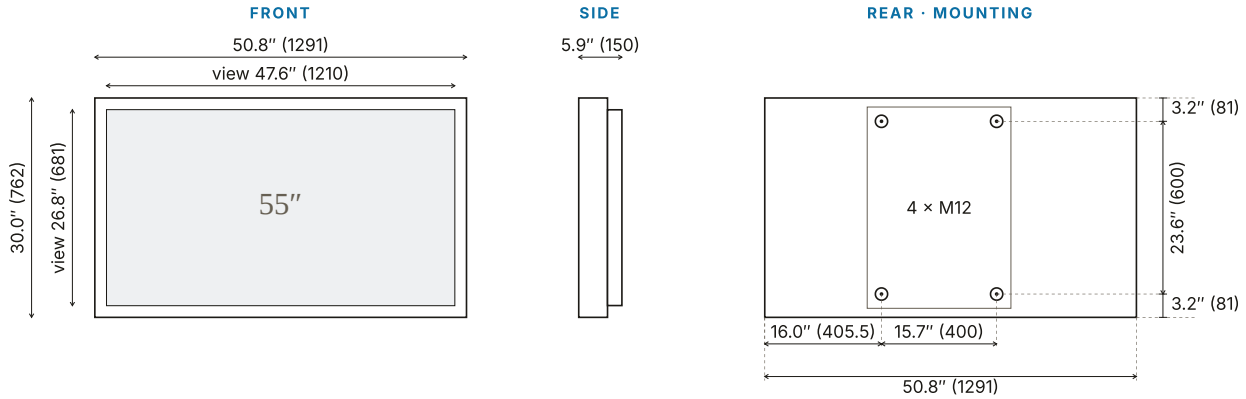

Inches (millimeters). Viewing area shown shaded.

Specifications

Brightness	3,000 nits
Resolution	3840 × 2160 4K Ultra HD
Panel	Grade A wide-temp industrial LCD
Cover glass	AG/AR tempered glass, fully bonded

Enclosure	Fully sealed, aluminum heat sink
Electronics	Wide-temperature boards throughout
Auto-dimming	Brightness sensor + remote receiver
Connections	HDMI, USB, power (sealed); Wi-Fi

Included & options

3,000-nit brightness
Standard on every size

AG / AR glass
Anti-glare, anti-reflective, fully bonded

Wall bracket
Included, matched to the M12 points

Options
Capacitive touch · floor stand (page 2)


OPTIONAL FLOOR STAND

55″ HighBright on Floor Stand

Display **SSI-HB55W** + floor stand **SSI-FS55**

Turn the 55″ HighBright display into a freestanding outdoor kiosk. The stand bolts to a concrete pad and brings power and signal cables up through the base, out of sight.

Dimensions · floor stand

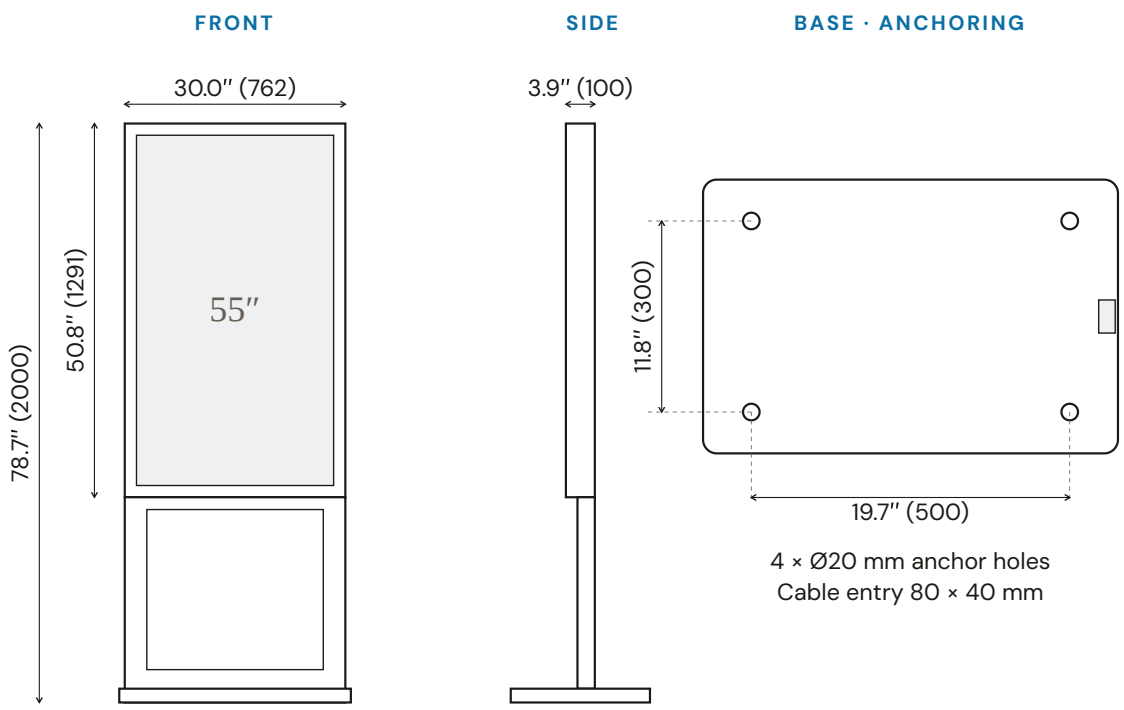

Inches (millimeters). Base plan enlarged for clarity.

Floor stand details

Overall height	78.7″ (2000 mm)
Width	30.0″ (762 mm)
Display section	50.8″ tall (1291 mm), mounted at the top of the stand
Anchoring	4 × Ø20 mm holes, 19.7″ × 11.8″ (500 × 300 mm)
Cable entry	80 × 40 mm opening in the base plate
Stand model	SSI-FS55

Anchor to a level concrete pad sized for local wind loads. Confirm anchoring with your installer or engineer.

SEALED OUTDOOR DISPLAY · WALL MOUNT

65″ HighBright Outdoor Display

Model **SSI-HB65W** · Wall bracket included · Mounts landscape or portrait




A fully sealed, 3,000-nit display for patios, storefronts, drive-thrus, pool decks and outdoor theaters, built to stay outside year-round.

3,000	4K	AG / AR	5.9″
nits brightness	Ultra HD	bonded glass	overall depth

Screen size	65″ class (diagonal)
Outer dimensions	59.4″ W × 34.8″ H × 5.9″ D (1509 × 884 × 150 mm)
Viewing area	56.3″ × 31.7″ (1429 × 804 mm)
Mounting pattern	15.7″ × 27.6″ (400 × 700 mm), 4 × M12

Dimensions · wall mount

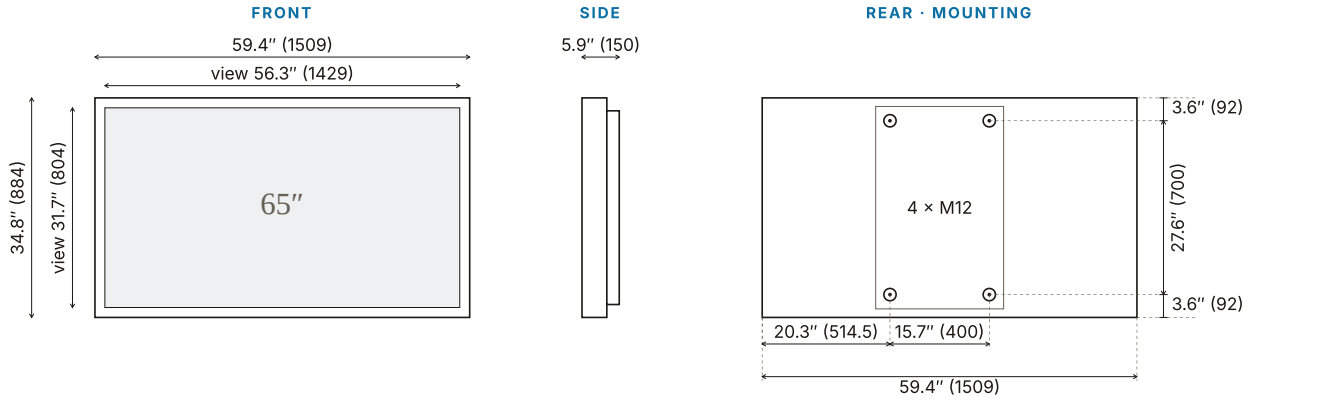

Inches (millimeters). Viewing area shown shaded.

Specifications

Brightness	3,000 nits
Resolution	3840 × 2160 4K Ultra HD
Panel	Grade A wide-temp industrial LCD
Cover glass	AG/AR tempered glass, fully bonded

Enclosure	Fully sealed, aluminum heat sink
Electronics	Wide-temperature boards throughout
Auto-dimming	Brightness sensor + remote receiver
Connections	HDMI, USB, power (sealed); Wi-Fi

Included & options

3,000-nit brightness
Standard on every size

AG / AR glass
Anti-glare, anti-reflective, fully bonded

Wall bracket
Included, matched to the M12 points

Options
Capacitive touch · floor stand (page 2)


OPTIONAL FLOOR STAND

65″ HighBright on Floor Stand

Display **SSI-HB65W** + floor stand **SSI-FS65**

Turn the 65″ HighBright display into a freestanding outdoor kiosk. The stand bolts to a concrete pad and brings power and signal cables up through the base, out of sight.

Dimensions · floor stand

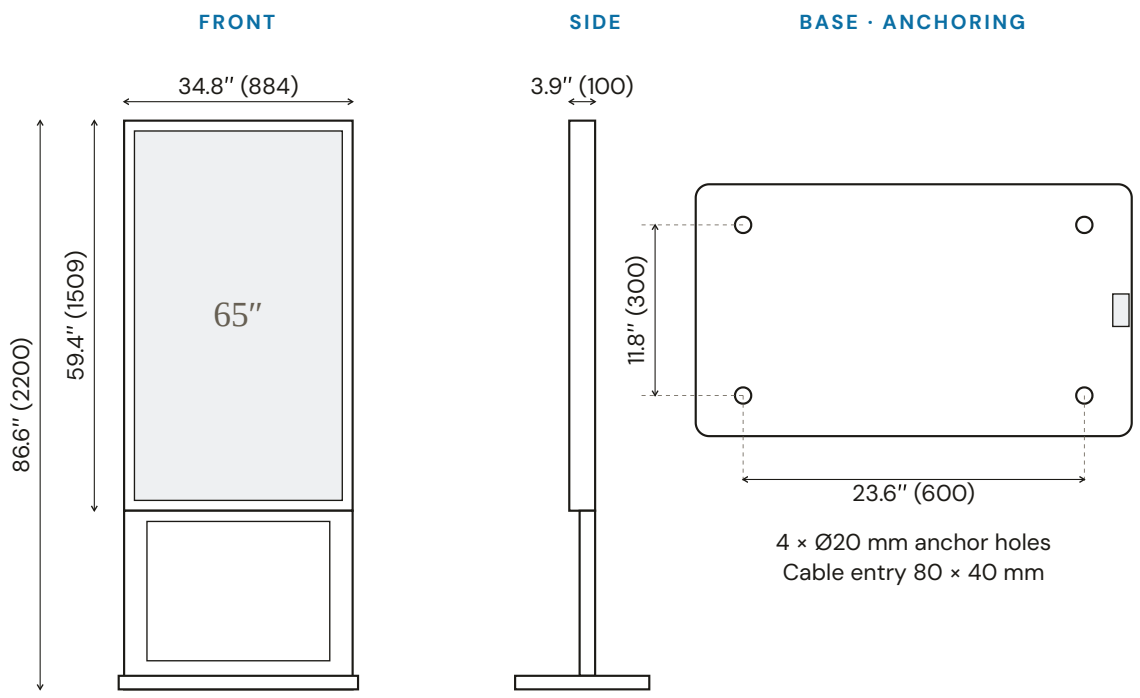

Inches (millimeters). Base plan enlarged for clarity.

Floor stand details

Overall height	86.6″ (2200 mm)
Width	34.8″ (884 mm)
Display section	59.4″ tall (1509 mm), mounted at the top of the stand
Anchoring	4 × Ø20 mm holes, 23.6″ × 11.8″ (600 × 300 mm)
Cable entry	80 × 40 mm opening in the base plate
Stand model	SSI-FS65

Anchor to a level concrete pad sized for local wind loads. Confirm anchoring with your installer or engineer.

SSI | SCREEN SOLUTIONS INTERNATIONAL

Let's plan your outdoor display

Screen Solutions International
269 Technology Way, Suite 1, Rocklin, CA 95765

(888) 631-5880
ssisales@ssidisplays.com
ssidisplays.com

Dealer inquiries welcome. Specifications and prices subject to change without notice.